




# VTX 1 M 740 - Cell data sheet

## Classification

Brand	Alcad
Cell type	VTX 1 M 740
Cell P/N	310563181
Capacity at 5 hours rate	740 Ah
IEC Designation	KGM740P
According to	IEC 62259

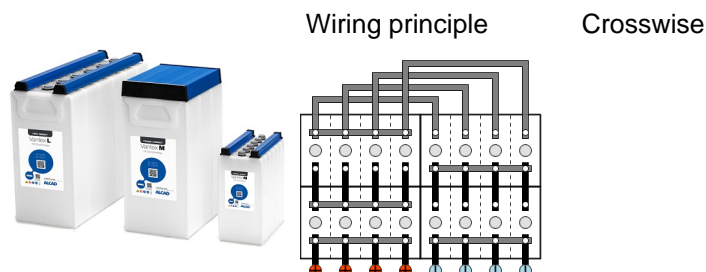

## Physical data

Overall height	411 mm		
Cell height			
Width	195 mm	Weight per cell	42,9 Kg
Length	327 mm		

## Construction

Container material	Polypropylene	No. of terminals/polarity	4
Separator type	Felt	Terminal material	Steel
Connection torque	30,0 +/- 3,0 Nm	Vent type	Low pressure flame arresting vent (large)
Terminal size	M10 SW 16 mm	Handle	Yes

## Plates

Positive		Negative	
Type of plates	Maintenance Free Pocket	Type of plates	Maintenance Free Pocket

## Electrolyte

Electrolyte type: Renewal	E13	Max/Min	50 mm
Electrolyte type: Initial	E22	Vent oil quantity	
Electrolyte per cell: Liquid	10,6 liters		

## Connection

Cable area of internal connection cables	70 mm <sup>2</sup>	End-lug (and external cable)	70 mm <sup>2</sup>
--	--------------------	------------------------------	--------------------

ALCAD confidential and proprietary. The data herein given are for information purposes only and are not binding on ALCAD. They may be modified without prior notice. Please contact an ALCAD representative in order to obtain confirmation of the above data.

Visit our website at [www.alcad.com](http://www.alcad.com)

380603 00000000-0000-0000-0000-000000000000 Version: 3.5, Last updated on 01/2024, Referential data 5/13/2024



# VTX 1 M 740 - Cell data sheet

## Charging

Float voltage	1,42 V/Cell	High rate voltage (min)	1,45 V/Cell
Single-level voltage	1,42 V/Cell		

## Resistance/Short circuit

Internal resistance	0,15 mOhm	Short circuit current	8023 A
---------------------	-----------	-----------------------	--------

## Performance data

### Current discharge

After prolonged float charge of fully charged cells. Available amperes at +20°C +/- 5°C (+68°F +/- 9°F)

V/Cell	10h	8h	5h	3h	2h	1,5h	1h	30m	20m	15m	10m	5m	1m	30s	5s	1s
1	74,2	92,1	148	237	348	454	607	828	936	1.004	1.090	1.264	1.333	1.527	1.740	1.866
1,05	73,7	91,5	144	234	342	432	537	689	778	830	895	1.036	1.136	1.294	1.471	1.575
1,1	72,9	90,4	142	229	318	372	440	541	594	628	690	812	938	1.079	1.230	1.308
1,14	71,6	88,6	137	210	263	292	337	413	451	478	520	635	739	863	991	1.046

### Power discharge

Available power (W), after prolonged float charged of fully charged cells at +20°C +/- 5°C (+68°F +/- 9°F)

V/Cell	10h	8h	5h	3h	2h	1,5h	1h	30m	20m	15m	10m	5m	1m	30s	5s	1s
1	88,4	109	173	264	378	484	626	840	944	1.010	1.093	1.264	1.333	1.527	1.740	1.866
1,05	88,0	108	168	262	374	467	576	731	821	875	941	1.088	1.193	1.358	1.545	1.654
1,1	87,1	107	167	262	359	417	490	599	655	693	760	893	1.032	1.187	1.353	1.439
1,14	85,6	105	162	245	304	336	387	473	515	545	593	724	843	984	1.130	1.192

ALCAD confidential and proprietary. The data herein given are for information purposes only and are not binding on ALCAD. They may be modified without prior notice. Please contact an ALCAD representative in order to obtain confirmation of the above data.

Visit our website at [www.alcad.com](http://www.alcad.com)

380603 00000000-0000-0000-0000-000000000000 Version: 3.5, Last updated on 01/2024, Referential data  
5/13/2024



# VTX 1 M 740 - Cell data sheet

## Kt Factor

### Current discharge

After prolonged float charge of fully charged cells. Kt factor at +20°C +/- 5°C (+68°F +/- 9°F)

V/Cell	10h	8h	5h	3h	2h	1,5h	1h	30m	20m	15m	10m	5m	1m	30s	5s	1s
1	10,0	8,04	5,00	3,12	2,13	1,63	1,22	0,89	0,79	0,74	0,68	0,59	0,56	0,48	0,43	0,40
1,05	10,0	8,09	5,14	3,16	2,17	1,71	1,38	1,07	0,95	0,89	0,83	0,71	0,65	0,57	0,50	0,47
1,1	10,1	8,18	5,22	3,24	2,33	1,99	1,68	1,37	1,25	1,18	1,07	0,91	0,79	0,69	0,60	0,57
1,14	10,3	8,35	5,38	3,52	2,82	2,53	2,20	1,79	1,64	1,55	1,42	1,16	1,00	0,86	0,75	0,71

### Power discharge

Kt factor power, after prolonged float charged of fully charged cells at +20°C +/- 5°C (+68°F +/- 9°F)

V/Cell	10h	8h	5h	3h	2h	1,5h	1h	30m	20m	15m	10m	5m	1m	30s	5s	1s
1	8,37	6,80	4,28	2,80	1,96	1,53	1,18	0,88	0,78	0,73	0,68	0,59	0,56	0,48	0,43	0,40
1,05	8,41	6,84	4,40	2,82	1,98	1,59	1,28	1,01	0,90	0,85	0,79	0,68	0,62	0,54	0,48	0,45
1,1	8,50	6,89	4,44	2,83	2,06	1,77	1,51	1,24	1,13	1,07	0,97	0,83	0,72	0,62	0,55	0,51
1,14	8,65	7,02	4,57	3,02	2,44	2,20	1,91	1,57	1,44	1,36	1,25	1,02	0,88	0,75	0,66	0,62

ALCAD confidential and proprietary. The data herein given are for information purposes only and are not binding on ALCAD. They may be modified without prior notice. Please contact an ALCAD representative in order to obtain confirmation of the above data.

Visit our website at [www.alcad.com](http://www.alcad.com)